


SZ040-220SC Data Sheet

Model		SZ040-220SC
Electric features		1P2W
Max. continuous operating voltage	Uc	320V
Nominal discharge current (8/20μs)	In (L/N-PE)	20kA
Max. discharge current (8/20μs)	Imax (L/N-PE)	40kA
Voltage protection level	Up	<2kV
Response time	tA (L/N-PE)	<25ns
Rated short-circuit current	ISCCR (L-N)	100kA
Mechanical features		
Thermal protection		Yes
Temperature Range		-40°C~+80°C
Installation method		4XM4 Bolt
Degree of protection of enclosure		IP20
Enclosure material		Steel 1.2mm
Replacement indicator		Red LED (ON)
Remote control contact		Yes (Option)
Contact ratings		AC 250V/1A, 125V/2A
Wiring Size		6mm ²

Diagram

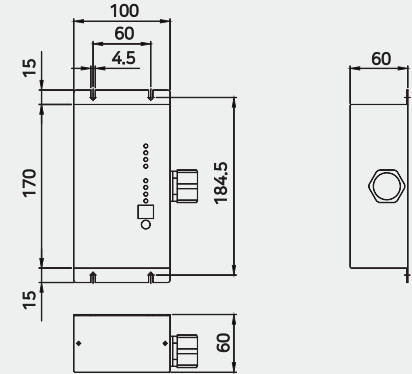

Installation

