


SZE-L-1P2W(2+1) Data Sheet

Model		SZE-L-1P2W(2+1)
Electric features		1P2W (Slow charge)
Rated operating voltage	Un	220V
Max. continuous operating voltage	Uc	275V
Nominal discharge current (8/20μs)	In	5kA
Max. discharge current (8/20μs)	Imax	10kA
Response time	Up	<1.5kV
Rated short-circuit current	tA (L-N/N-PE)	<25ns/100ns
Mechanical features		
Temperature Range		-40°C~+80°C
Installation method		M4 Bolt
Degree of protection of enclosure		IP20
Enclosure material		Thermoplastic ; extinguishing degree UL 94 V-0
Wiring size		L/N : 1.5mm ² , PE : 6mm ²

Diagram

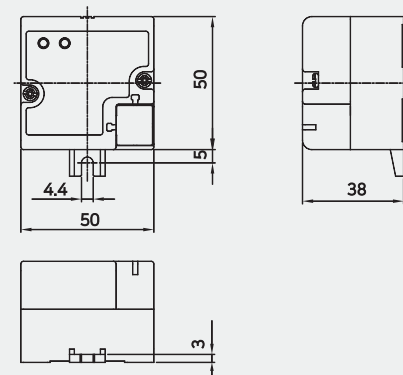

Installation

