


■ SZK-12.5-380D Data Sheet (KS C IEC 61643-11)

Model		SZK-12.5-380D
Electric features		3P3W
Max. continuous operating voltage	Uc	275V
Impulse discharge current (10/350μs)	Iimp (L-PE)	12.5kA
Nominal discharge current (8/20μs)	In (L-PE)	12.5kA
Voltage protection level	Up	<2kV
Response time	tA (L-PE)	<25ns
Rated short-circuit current	ISCCR (L-PE)	25kA
Mechanical features		
Thermal protection		Yes
Temperature Range		-40°C~+80°C
Installation method		4XM4 Bolt
Degree of protection of enclosure		IP20
Enclosure material		Steel 1,6mm
Replacement indicator		Red LED (ON)
Remote control contact		Yes
Wiring size		L : 10mm ² , PE : 16mm ²

■ Diagram

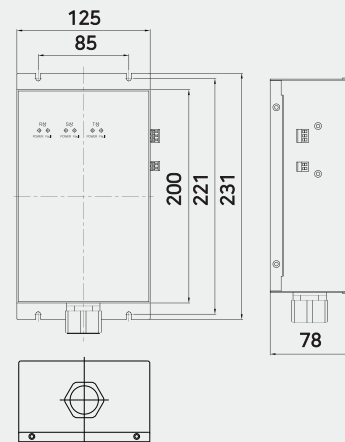

■ Installation

